


General Description

The SE1484 is a monolithic synchronous buck regulator. The device integrates 95 mΩ MOSFETS that provide 3A continuous load current over a wide operating input voltage of 4.5V to 27V. Current mode control provides fast transient response and cycle-by-cycle current limit. An adjustable soft-start prevents inrush current at turn on.

Features

- 3A Output Current
- Wide 4.5V to 27V Operating Input Range
- Output Adjustable from 0.925V to 0.8Vin
- Up to 93% Efficiency
- Programmable Soft-Start
- Stable with Low ESR Ceramic Output Capacitors
- Fixed 340KHZ Frequency
- Cycle-by-Cycle Over Current Protection
- Short Circuit Protection
- Input Under Voltage Lockout
- Package : PSOP-8

Pin Configuration

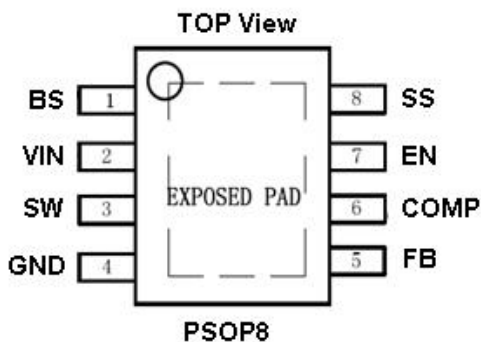

Applications

- Distributed Power Systems
- Green Electronics/ Appliances
- Notebook Computers
- Networking Systems
- FPGA, DSP, ASIC Power Supplies

Typical Application

